

IGBT MODULE (S-Series)


Outline Drawing

Features

- NPT-Technology
- Solderable Package
- Square SC SOA at $10 \times I_C$
- High Short Circuit Withstand-Capability
- Small Temperature Dependence of the Turn-Off Switching Loss
- Low Losses And Soft Switching

Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

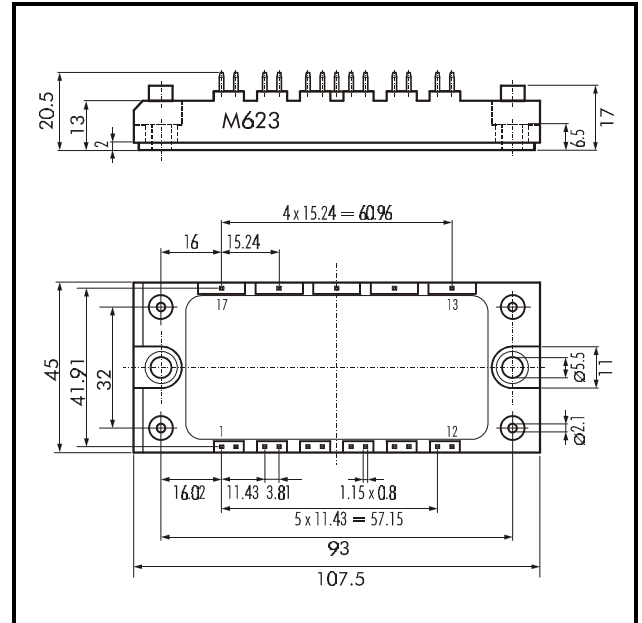


Maximum Ratings and Characteristics

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

Items	Symbols	Rated Values	Units	
Collector-Emitter Voltage	V_{CES}	1200	V	
Gate -Emitter Voltage	V_{GES}	± 20		
Collector Current	Continuous	$25^\circ\text{C} / 80^\circ\text{C}$	A	
		I_C		50 / 35
	1ms	$25^\circ\text{C} / 80^\circ\text{C}$	A	
		$I_{C \text{ PULSE}}$		100 / 70
Continuous	$-I_C$	35	A	
1ms	$-I_{C \text{ PULSE}}$	70		
Max. Power Dissipation	P_C	240	W	
Operating Temperature	T_j	+150	$^\circ\text{C}$	
Storage Temperature	T_{stg}	-40 ~ +125		
Isolation Voltage	A.C. 1min.	V_{is}	2500	V
Screw Torque	Mounting*	3.5	Nm	

Note: *Recommendable Value; 2.5 - 3.5 Nm (M5)

Equivalent Circuit






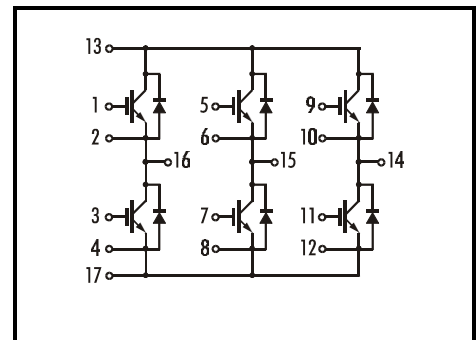








Electrical Characteristics (at $T_j=25^\circ\text{C}$)

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=1200V$			1.0	mA
Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$			200	nA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=20V$ $I_C=35mA$	5.5	7.2	8.5	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=35A$; $T_j = 25^\circ\text{C}$		2.3	2.65	
		$V_{GE}=15V$ $I_C=35A$; $T_j = 125^\circ\text{C}$		2.8		
Input Capacitance	C_{ies}	$V_{GE}=0V$		4000		pF
Output Capacitance	C_{oes}	$V_{CE}=10V$		875		
Reverse Transfer Capacitance	C_{res}	$f=1MHz$		770		
Turn-on Time	t_{ON}	$V_{CC}=600V$ $I_C=35A$ $V_{GE}=\pm 15V$ $R_G=33\Omega$ Inductive Load		0.35	1.2	μs
	$t_{r,x}$			0.25	0.6	
	$t_{r,i}$			0.10		
	t_{OFF}			0.45	1.0	
Turn-off Time	t_f		0.08	0.3		
Diode Forward On-Voltage	V_F	$I_F=35A$; $V_{GE}=0V$; $T_j = 25^\circ\text{C}$		2.5	3.3	V
		$I_F=35A$; $V_{GE}=0V$; $T_j = 125^\circ\text{C}$		2.0		
Reverse Recovery Time	t_{rr}	$I_F=35A$			350	ns


Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{th(j-c)}$	IGBT			0.52	$^\circ\text{C/W}$
	$R_{th(j-e)}$	Diode			0.90	
	$R_{th(c-f)}$	With Thermal Compound		0.05		

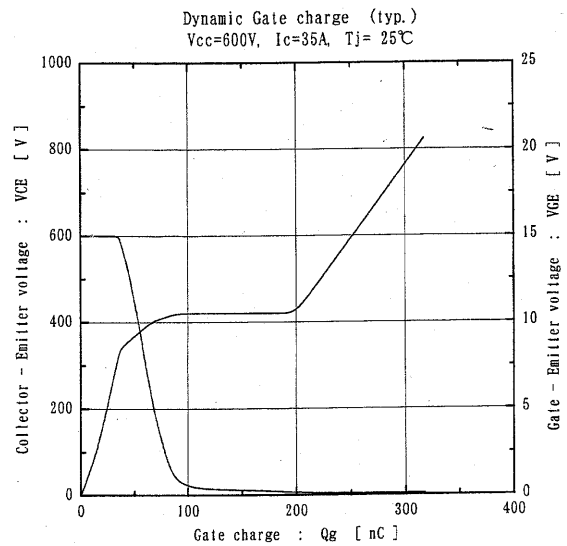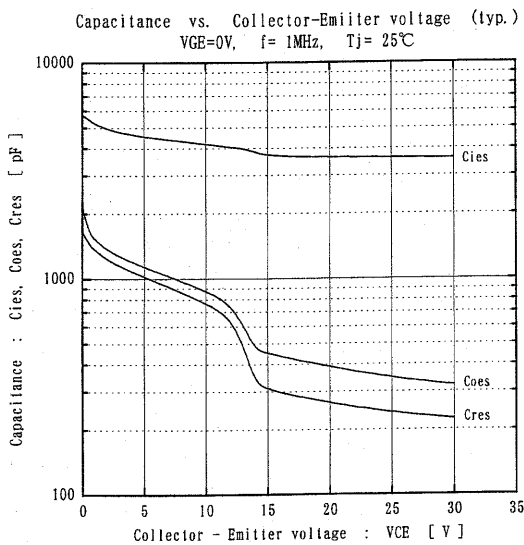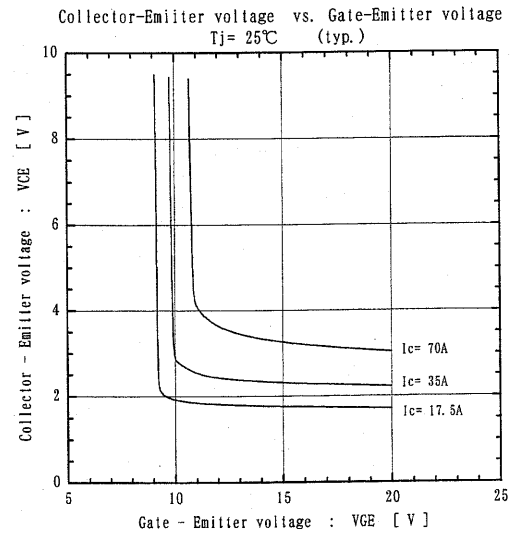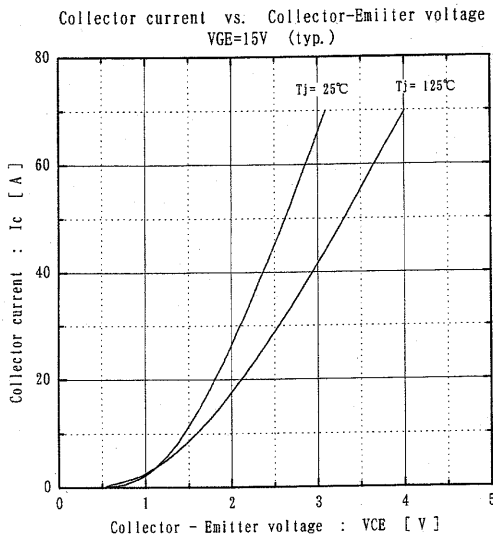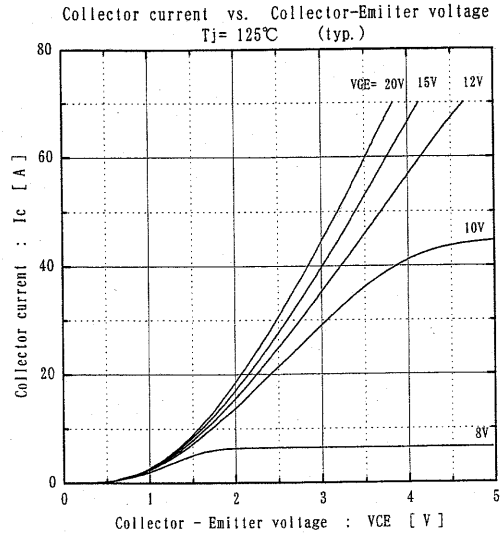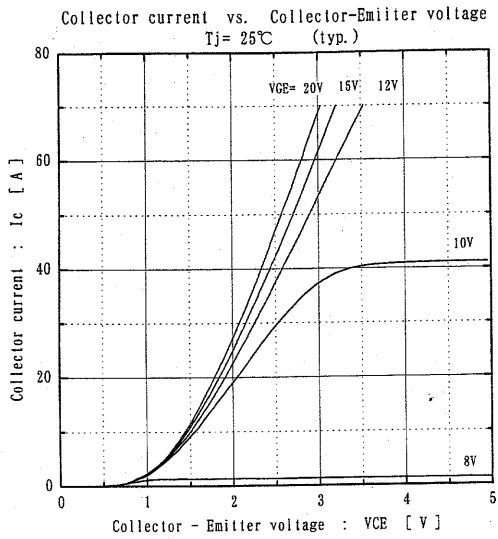


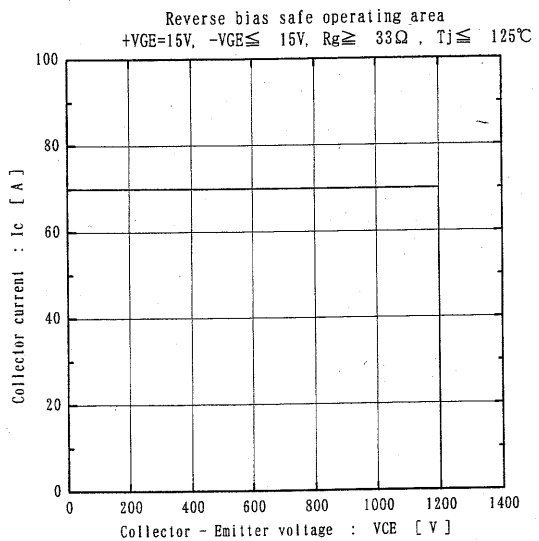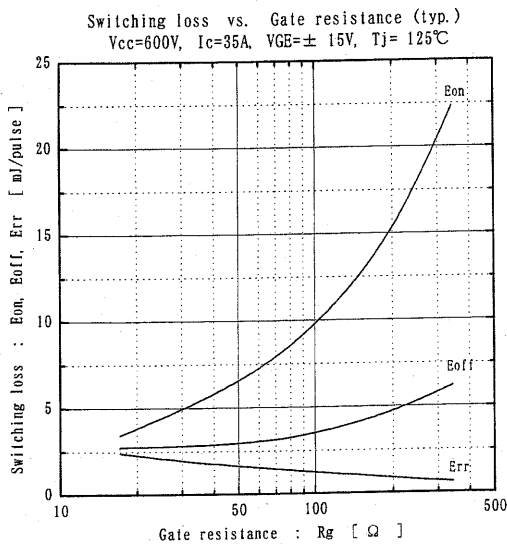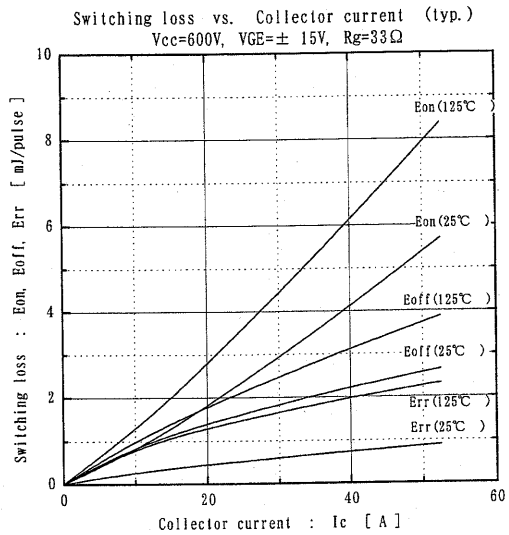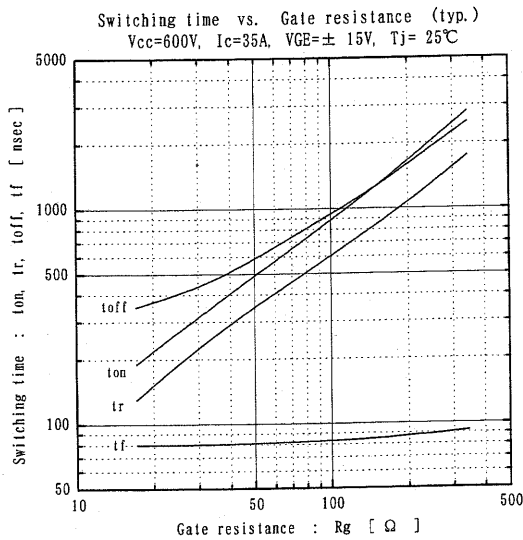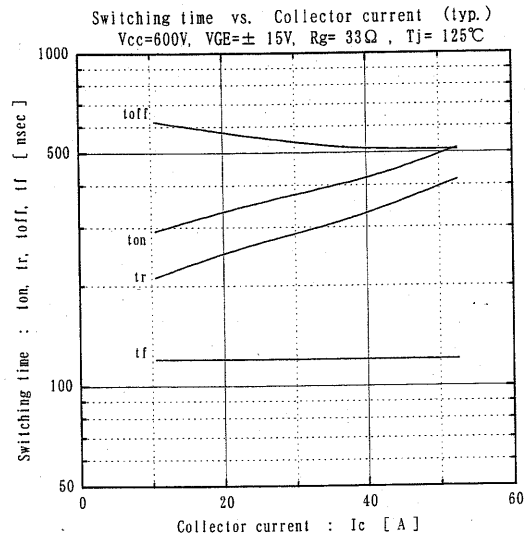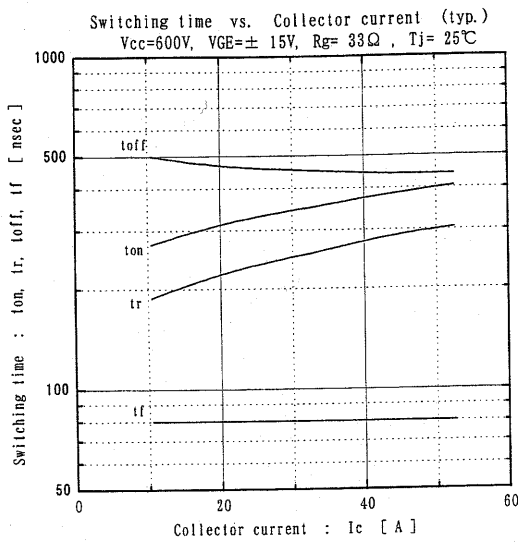

Forward current vs. Forward on voltage (typ.)

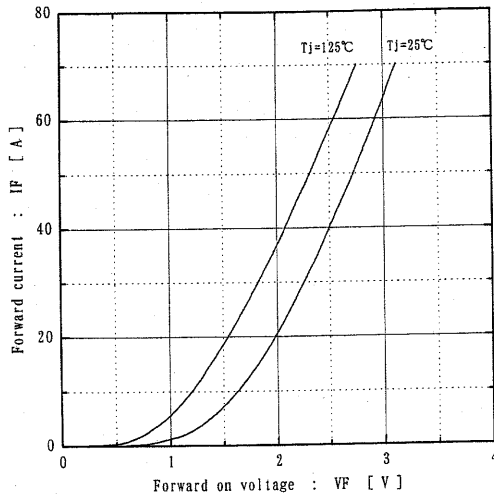

Reverse recovery characteristics (typ.)
Vcc=600V, VGE=±15V, Rg=33Ω

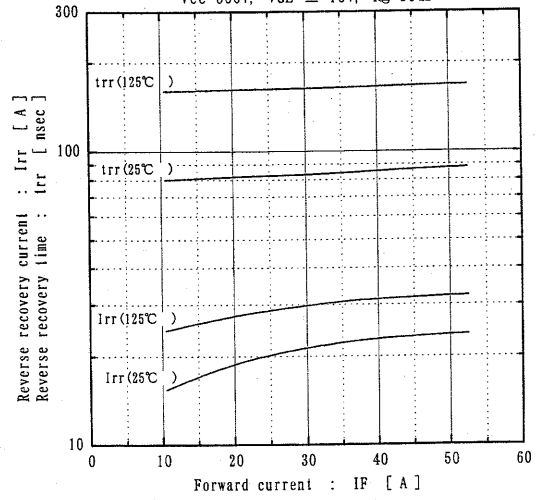

Transient thermal resistance

