

Rectifier Diode

Types W0507YH360 to W0507YH450

The data sheet on the subsequent pages of this document is a scanned copy of existing data for this product.

(Rating Report 96D04 Issue 2)

This data reflects the old part number for this product which is: SW36-45HXC270. This part number must **NOT** be used for ordering purposes – please use the ordering particulars detailed below.

The limitations of this data are as follows:
No reverse recovery information available

Please use the following link to view an up to date outline drawing for this device
[Outline W3](#)

Where any information on the product matrix page differs from that in the following data, the product matrix must be considered correct

An electronic data sheet for this product is presently in preparation.

For further information on this product, please contact your local ASM or distributor.

Alternatively, please contact Westcode as detailed below.

Ordering Particulars			
W0507	YH	◆◆	0
Fixed Type Code	Fixed Outline Code	Voltage code $V_{RRM}/100$ 36-45	Fixed Code
Typical Order Code: W0507YH380, 26.6mm clamp height, 3800V V_{RRM}			

<p>IXYS Semiconductor GmbH Edisonstraße 15 D-68623 Lampertheim Tel: +49 6206 503-0 Fax: +49 6206 503-627 E-mail: marcom@ixys.de</p>	 An  IXYS Company www.westcode.com www.ixys.com	<p>Westcode Semiconductors Ltd Langley Park Way, Langley Park, Chippenham, Wiltshire, SN15 1GE. Tel: +44 (0)1249 444524 Fax: +44 (0)1249 659448 E-mail: WSL.sales@westcode.com</p> <p>Westcode Semiconductors Inc 3270 Cherry Avenue Long Beach CA 90807 USA Tel: +1 (562) 595 6971 Fax: +1 (562) 595 8182 E-mail: WSI.sales@westcode.com</p>
--	---	---

The information contained herein is confidential and is protected by Copyright. The information may not be used or disclosed except with the written permission of and in the manner permitted by the proprietors Westcode Semiconductors Ltd.

© Westcode Semiconductors Ltd.

In the interest of product improvement, Westcode reserves the right to change specifications at any time without prior notice.

Devices with a suffix code (2-letter, 3-letter or letter/digit/letter combination) added to their generic code are not necessarily subject to the conditions and limits contained in this report.

QUALITY AND EVALUATION LABORATORY

Rating Report No: 96D04 Issue 2

Date: 17th March, 1999

Origin: PAR99009

Pages: 11

Capsule Diode Type SW36-45HXC270

Author: W. Findlay

Checked:

Approved:

1. Abstract

The HXC270 rectifier diode features a 30mm diameter silicon slice (manufacturing reference DANXH) mounted in a cold weld capsule.

Summary of changes to previous issue.	
Issue 1	Advance Data
Issue 2	Full Rating

The information contained herein is confidential and is protected by Copyright. The information may not be used or disclosed except with the written permission of and in the manner permitted by the proprietors Westcode Semiconductors Ltd.

In the interest of product improvement, Westcode reserves the right to change specifications at any time without prior notice.

2. Contents

1.0 Abstract	1
2.0 Contents	2
3.0 Introduction	2
4.0 Maximum Ratings	3
5.0 Characteristics	4
6.0 Notes on Ratings and Characteristics	
6.1 Voltage Grade Table	5
6.2 Extension of Voltage Grades	5
6.3 De-Rating Factor	5
6.4 Computer Modelling Parameters	
6.4.1 Device Dissipation Calculations	5
6.4.2 ABCD Coefficients	6
6.4.3 Thermal Impedance Calculations	6
7.0 Curves	
Figure 1 – Mean Forward Current vs. Maximum Power Dissipation, Double Side Cooled	7
Figure 2 – Mean Forward Current vs. Maximum Heatsink Temp, Double Side Cooled	7
Figure 3 – Mean Forward Current vs. Maximum Power Dissipation, Single Side Cooled	8
Figure 4 - Mean Forward Current vs. Maximum Heatsink Temp, Single Side Cooled	8
Figure 5 – Limit Forward Voltage Characteristics	9
Figure 6 – Transient Thermal Impedance	9
Figure 7 – Surge Current and I^2t vs. Duration of Surge	10
8.0 Layout Drawing and Ordering Information	11

3. Introduction

The HXC270 rectifier diode features a 30mm diameter silicon slice mounted in a cold weld capsule.

Capsule Diode Types SW36-45HXC270

4.0 Maximum Ratings

	VOLTAGE RATINGS	MAXIMUM LIMITS	UNITS
V_{RRM}	Repetitive peak reverse voltage, (note 1).	3600-4500	V
V_{RSM}	Non-repetitive peak reverse voltage, (note 1).	3700-4600	V

	RATINGS	MAXIMUM LIMITS	UNITS
$I_{F(AV)}$	Mean on-state current, $T_{sink}=55^{\circ}C$, (note 2).	505	A
$I_{F(AV)}$	Mean on-state current. $T_{sink}=100^{\circ}C$, (note 2).	345	A
$I_{F(AV)}$	Mean on-state current. $T_{sink}=100^{\circ}C$, (note 3).	210	A
$I_{F(RMS)}$	Nominal RMS on-state current, $25^{\circ}C$, (note 2).	935	A
$I_{F(d.c.)}$	D.C. on-state current, $25^{\circ}C$, (note 5).	805	A
I_{FSM}	Peak non-repetitive surge $t_p=10ms$, $V_{RM}=0.6V_{RRM}$, (note 4).	7600	A
I_{FSM2}	Peak non-repetitive surge $t_p=10ms$, $V_{RM}\leq 10V$, (note 4).	8200	A
I^2t	I^2t capacity for fusing $t_p=10ms$, $V_{RM}=0.6V_{RRM}$, (note 4).	289×10^3	A^2s
I^2t	I^2t capacity for fusing $t_p=10ms$, $V_{RM}\leq 10V$, (note 4).	336×10^3	A^2s
T_{HS}	Operating temperature range.	-40 to +160	$^{\circ}C$
T_{stg}	Storage temperature range.	-55 to +160	$^{\circ}C$

Notes:

- 1) De-rating factor of 0.13% per $^{\circ}C$ is applicable for T_j below $25^{\circ}C$.
- 2) Double side cooled, single phase; 50Hz, 180° half-sine wave.
- 3) Single side cooled, single phase; 50Hz, 180° half-sine wave.
- 4) Half-sinewave, $160^{\circ}C$ T_j initial.
- 5) Double Side Cooled.

5.0 Characteristics

	CHARACTERISTICS	MIN	TYP	MAX	TEST CONDITIONS	UNITS
V_{FM}	Maximum peak forward voltage.	-	-	1.50	$I_F=635A.$	V
V_0	Threshold voltage.	-	-	0.97		V
r_S	Slope resistance.	-	-	0.88		m Ω
I_{RRM}	Peak reverse current.	-	-	30	Rated V_{RRM}	mA
R_{θ}	Thermal resistance junction to sink.	-	-	0.1	Double side cooled.	$^{\circ}C/W$
		-	-	0.2	Single side cooled.	$^{\circ}C/W$
F	Mounting force.	3.3	-	5.5		kN
W_t	Weight.	-	140	-		g

Notes:-

- 1) Unless otherwise indicated $T_j=160^{\circ}C.$

6.0 Notes on ratings and characteristics

6.1 Voltage grade table

Voltage Grade 'H'	V _{RRM} V	V _{RSM} V	V _R D.C.
36	3600	3700	1900
38	3800	3900	1950
40	4000	4100	2000
42	4200	4300	2040
44	4400	4500	2080
45	4500	4600	2100

6.2 Extension of voltage grades

This report is applicable to other and higher voltage grades when supply has been agreed by Sales/Production.

6.3 De-rating factor

A blocking voltage de-rating factor of 0.13% per deg Celsius is applicable to this device for T_j below 25°C.

6.4 Computer modelling parameters

6.4.1 Device dissipation calculations

$$I_{AV} = \frac{-V_o + \sqrt{V_o^2 + 4 * ff^2 * r_s * W_{AV}}}{2 * ff^2 * r_s}$$

Where V_o= 0.97 V, r_s=0.88 mΩ

$$W_{AV} = \frac{\Delta T}{R_{th}} \quad \Delta T = t_{jMax} - t_{HS}$$

R_{th} = Supplementary thermal impedance, see table below.

ff = Form factor, see table below.

Supplementary Thermal Impedance				
Conduction Angle	6 phase (60°)	3 phase (120°)	Half wave (180°)	d.c.
Square wave Double Side Cooled	0.130	0.117	0.110	0.1
Square wave Single Side Cooled	0.230	0.217	0.210	0.2
Sine wave Double Side Cooled	0.117	0.108	0.103	
Sine wave Single Side Cooled	0.217	0.208	0.203	

Form Factors				
Conduction Angle	60°	120°	180°	d.c.
Square wave	2.45	1.73	1.41	1
Sine wave	2.78	1.88	1.57	

6.4.2 ABCD Coefficients

The on-state characteristic I_F vs. V_F is represented in two ways; (i) the well established V_0 and r_s tangent used for rating purposes and (ii) a set of constants A, B, C, D, forming the coefficients of the representative equation for V_F in terms of I_F given as:

$$V_F = A + B \cdot \ln(I_F) + C \cdot (I_F) + D \cdot \sqrt{I_F}$$

The constants, derived by curve fitting software, are given in this report for both hot and cold characteristics where possible. The resulting values for V_F agree with the true device characteristic over a limited current range which is generally that over which the curve is plotted.

160°C Coefficients		25°C Coefficients	
A	0.2587428	A	0.6783057
B	0.1185595	B	0.03467407
C	8.401342×10^{-4}	C	4.695493×10^{-4}
D	-2.233814×10^{-3}	D	7.388426×10^{-3}

6.4.3 Thermal impedance calculations

$$r_t = \sum_{p=1}^{p=n} r_p \left(1 - e^{-\frac{t}{\tau_p}} \right)$$

Where $p = 1$ to n , n is the number of terms in the series.

- t = Duration of heating pulse in seconds.
- r_t = Thermal resistance at time t .
- r_p = Amplitude of p th term.
- τ_p = Time Constant of p th term.

D.C. Double Sided Cooled				
Term	1	2	3	4
r_p	0.04766233	0.03243763	9.409791×10^{-3}	9.611571×10^{-3}
τ_p	1.066889	0.1235431	0.03840402	3.538193×10^{-3}

D.C. Single Side Cooled					
Term	1	2	3	4	5
r_p	0.1366152	0.0151329	0.0383066	8.577754×10^{-3}	6.230917×10^{-3}
τ_p	6.983036	0.8476553	0.1217136	0.0159452	2.446305×10^{-3}

7.0 Curves

Figure 1 - Mean forward current vs. Power dissipation - Double side cooled

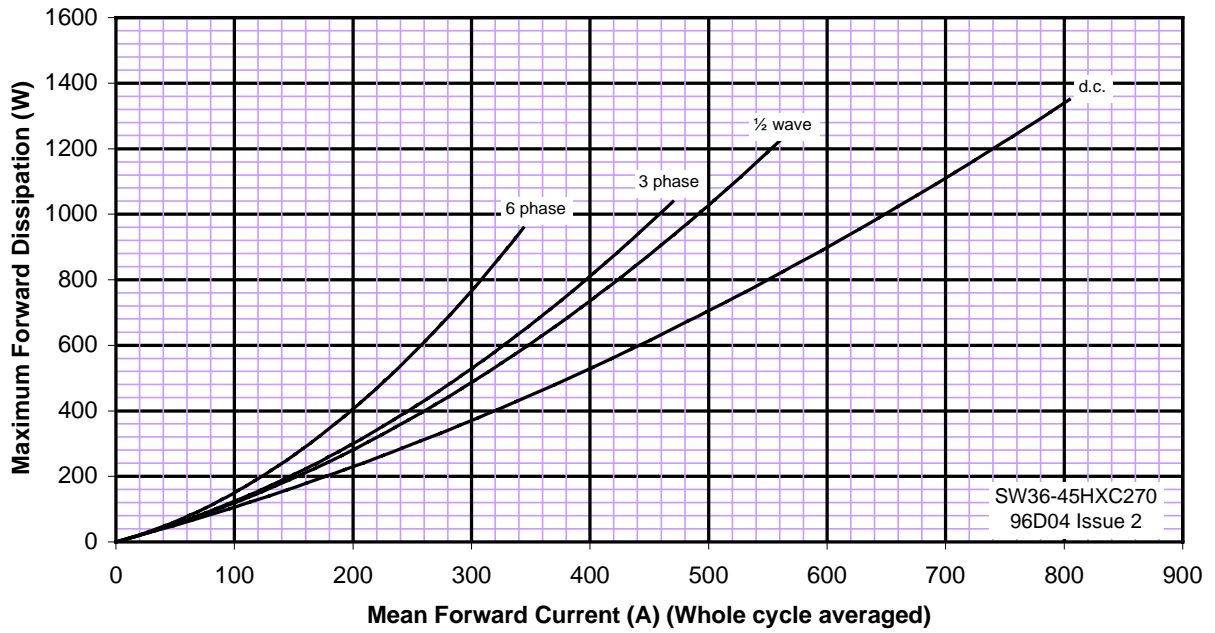


Figure 2 - Maximum permissible heatsink temperature vs. forward current - Double side cooled

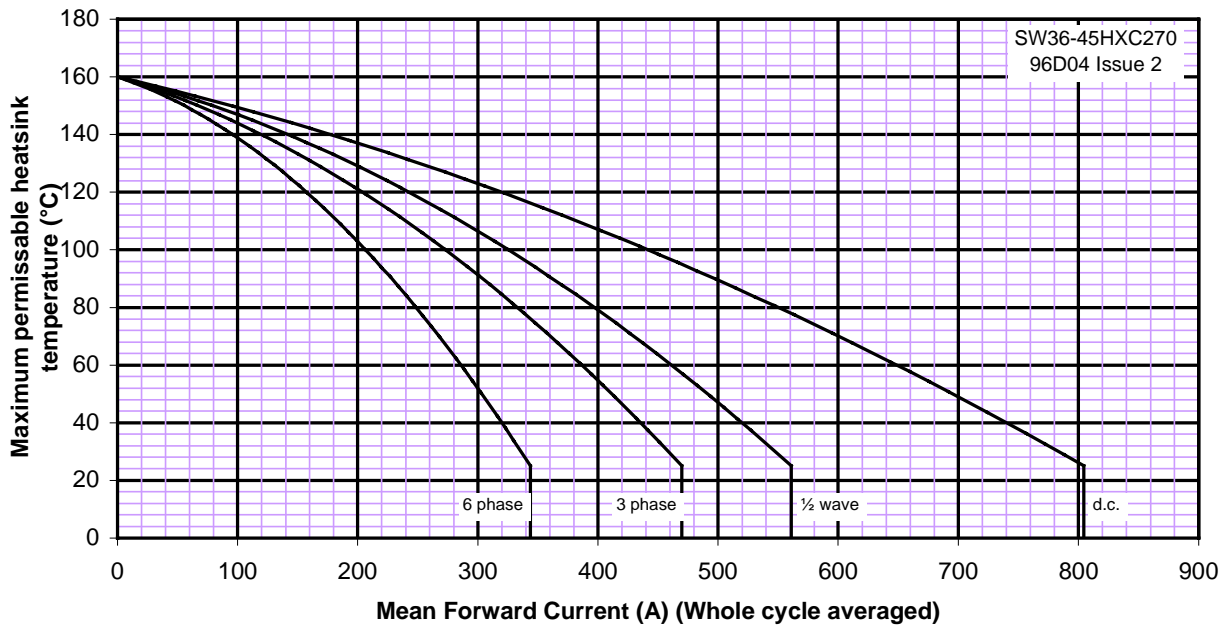


Figure 3 - Mean forward current vs. Power dissipation - Single side cooled

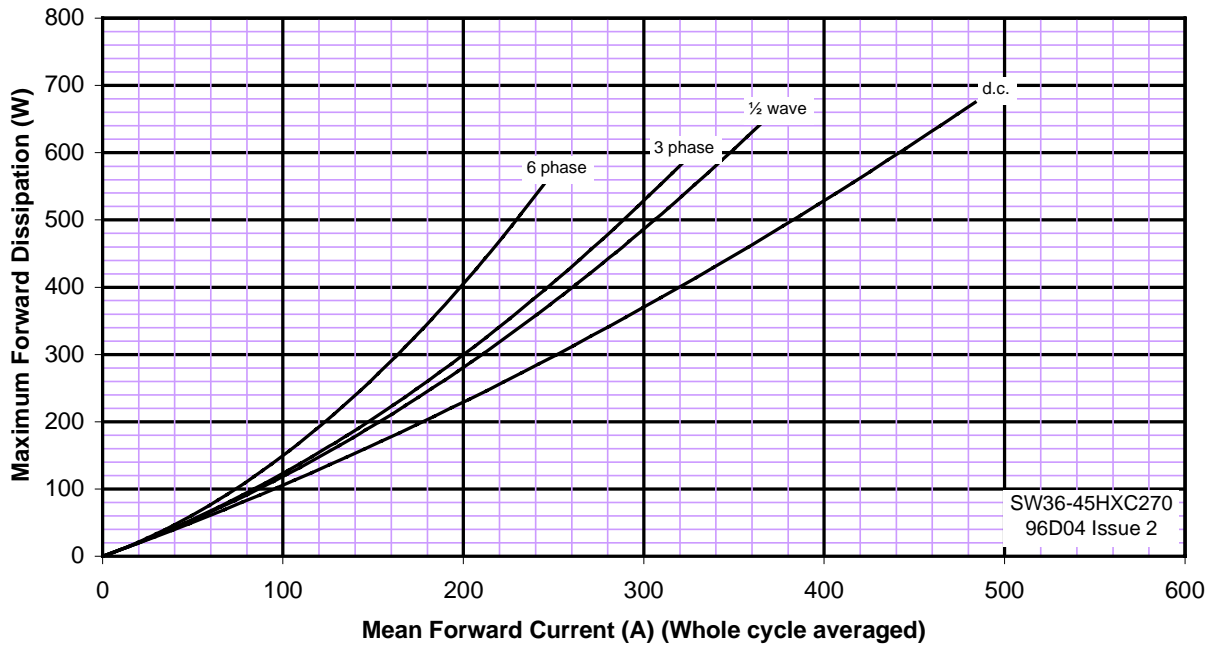


Figure 4 - Maximum permissible heatsink temperature vs. forward current - Single side cooled

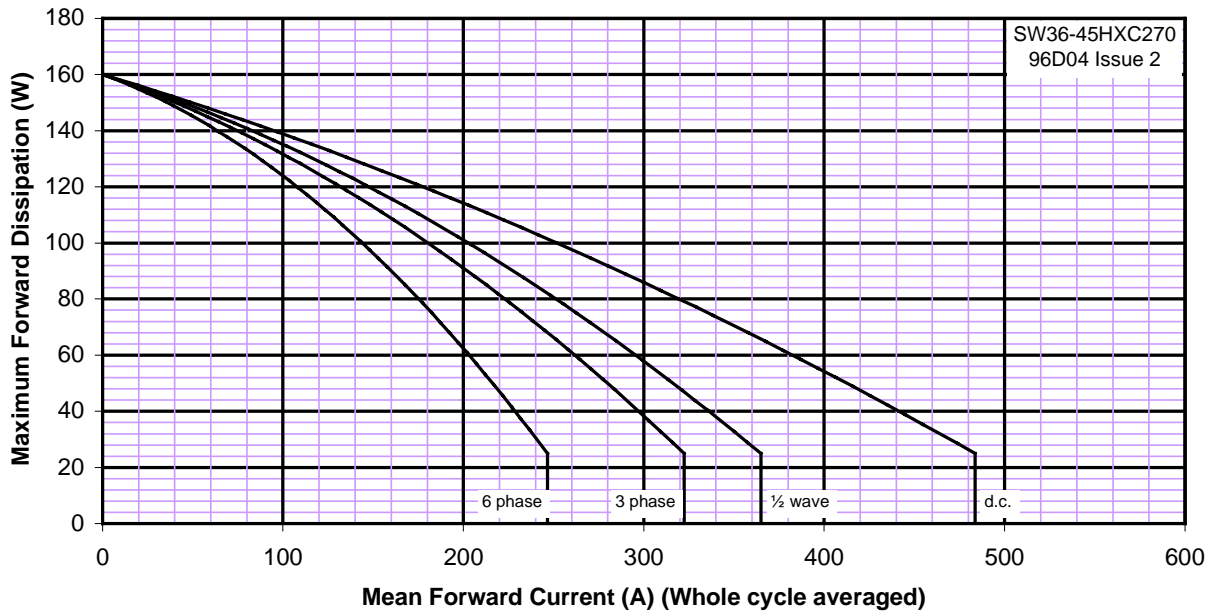


Figure 5 - Forward characteristics of limit device

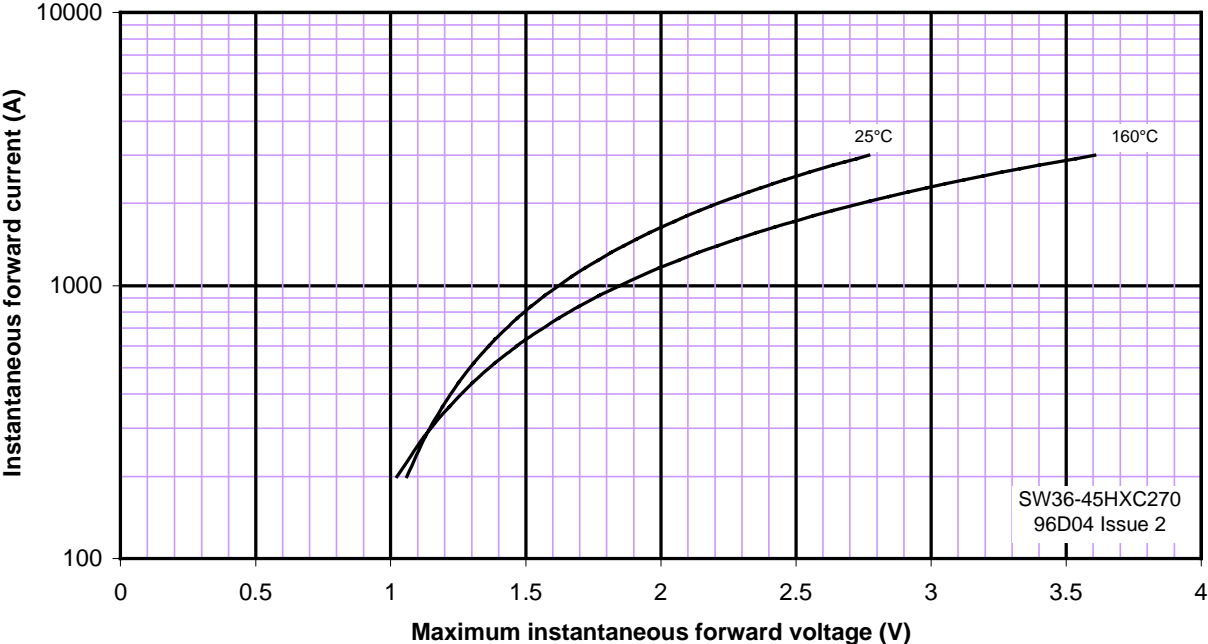


Figure 6 - Transient thermal impedance



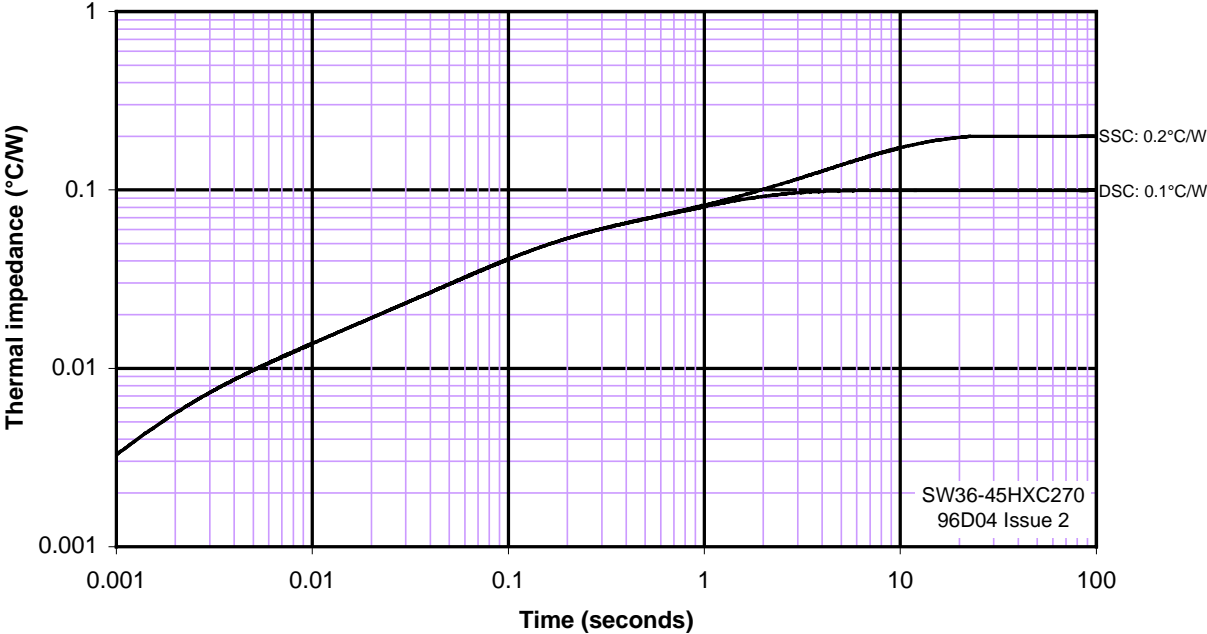


Figure 7 - Maximum non-repetitive surge current at initial junction temperature 160°C

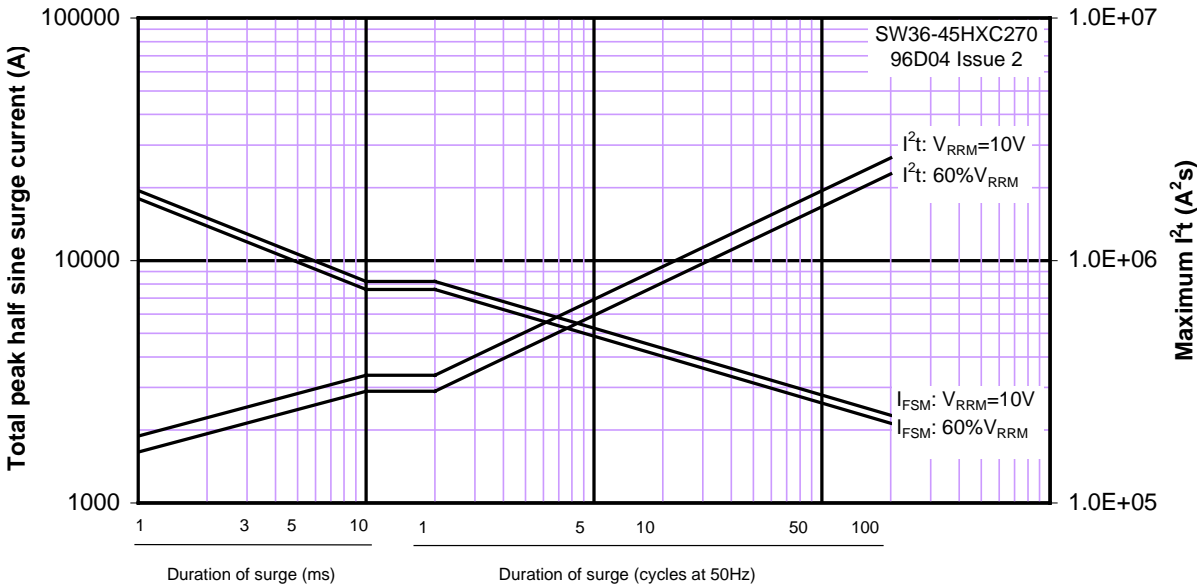

8.0 Layout Drawing and Ordering Information

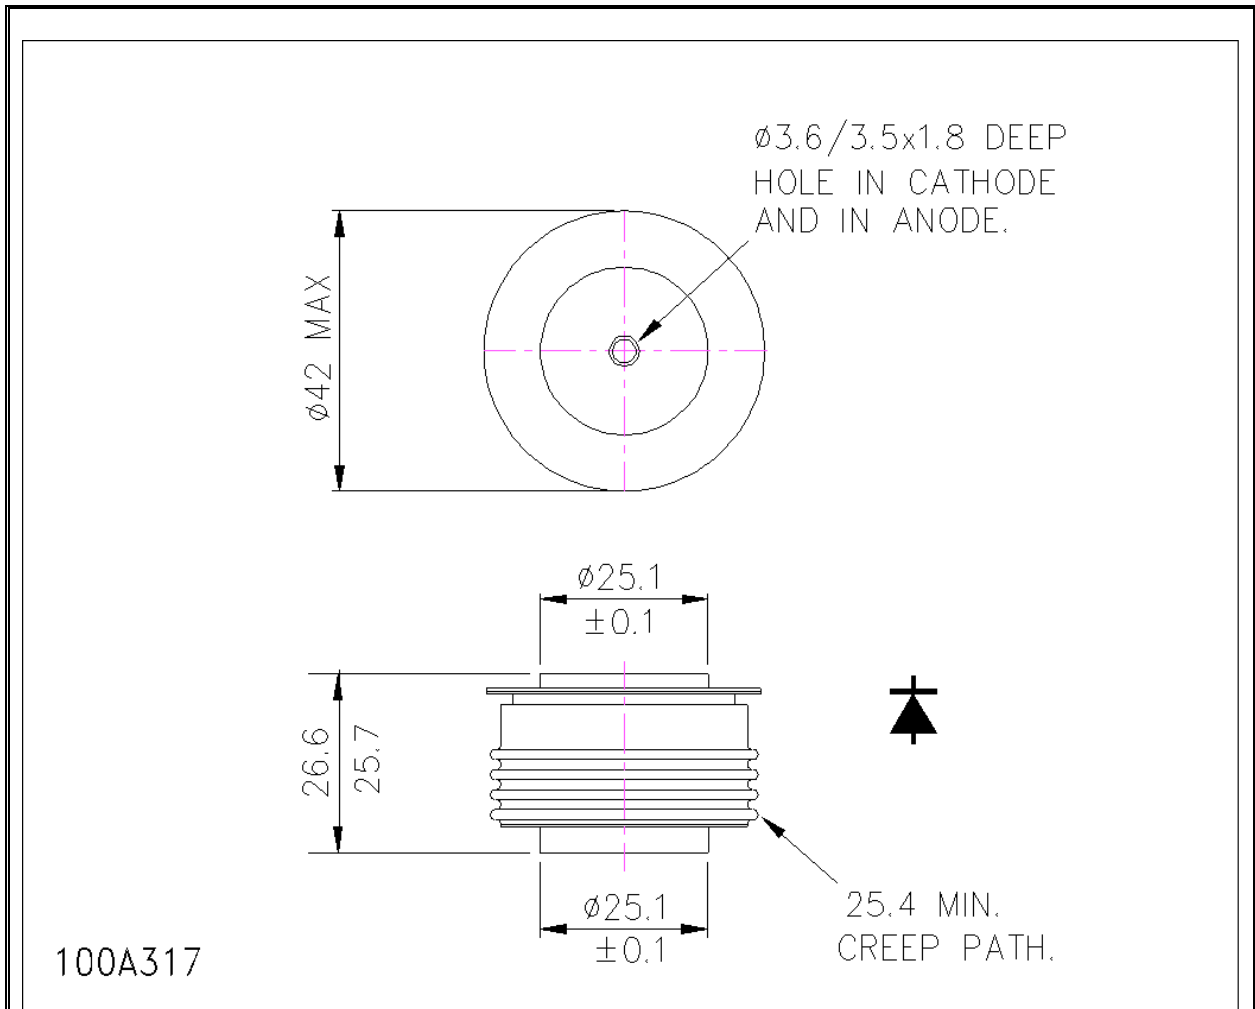

ORDERING INFORMATION		(Please quote 11 digit code as below)	
SW	◆ ◆	HXC	270
Fixed Type Code	Voltage Code	Fixed Outline Code	Fixed Type Code

Typical order code : SW45HXC270 – 4.5kV V_{RRM} Rectifier Diode, 26.6mm Clamp height capsule.

WESTCODE 
SEMICONDUCTORS

WWW: <http://www.westcode.com>

U.K : Westcode Semiconductors Ltd
 P.O. Box 57, Chippenham, Wiltshire, England SN15 1JL
 Tel: +44 (0)1249 444524 Fax: +44 (0)1249 659448

USA : Westcode Semiconductors Inc
 3270 Cherry Avenue, Long Beach, California 90807
 Tel: 562 595 8971 Fax: 562 595 8182

In the interest of Product improvement Westcode reserves the right to change specifications at any time without notice

©Westcode Semiconductors Ltd.

QEL REPORTS DISTRIBUTION

Rating Report No.: 96D04 Issue 2

Date: 17th March, 1999

Author: W. Findlay

Authorised by

Capsule Diode Type SW36-45HXC270

	Copies	Abstracts	Date Dispatched
P. Leach	-	1	
R.A. Jones	-	1	
F.J. Wakeman	1	-	
A.M. Hyde	1	-	
E.A. Wilkins	1	-	
A. Fowler	-	1	
P. Scarff	1	-	
W.S.I.	1	-	