

Provisional Data

Insulated Gate Bi-Polar Transistor Type T0340VB45G

Absolute Maximum Ratings

	VOLTAGE RATINGS	MAXIMUM LIMITS	UNITS
V_{CES}	Collector – emitter voltage	4500	V
$V_{DC\ link}$	Permanent DC voltage for 100 FIT failure rate.	2800	V
V_{GES}	Peak gate – emitter voltage	± 20	V

	RATINGS	MAXIMUM LIMITS	UNITS
$I_{C(DC)}$	Continuous DC collector current, IGBT	340	A
I_{CRM}	Repetitive peak collector current, $t_p=1ms$, IGBT	680	A
$I_{F(DC)}$	Continuous DC forward current, Diode	340	A
I_{FRM}	Repetitive peak forward current, $t_p=1ms$, Diode	680	A
I_{FSM}	Peak non-repetitive surge $t_p=10ms$, $V_{RM}=60\%V_{RRM}$, Diode (Note 4)	2060	A
I_{FSM2}	Peak non-repetitive surge $t_p=10ms$, $V_{RM}\leq 10V$, Diode (Note 4)	2280	A
P_{MAX}	Maximum power dissipation, IGBT (Note 2)	2.75	kW
$(di/dt)_{cr}$	Critical diode di/dt (note 3)	500	A/ μs
T_j	Operating temperature range.	-40 to +125	$^{\circ}C$
T_{stg}	Storage temperature range.	-40 to +125	$^{\circ}C$

Notes: -

- 1) Unless otherwise indicated $T_j = 125^{\circ}C$.
- 2) $T_{sink} = 25^{\circ}C$, double side cooled.
- 3) Maximum commutation loop inductance 250nH.
- 4) Half-sinewave, $125^{\circ}C$ T_j initial.

Characteristics

IGBT Characteristics

	PARAMETER	MIN	TYP	MAX	TEST CONDITIONS	UNITS	
V _{CE(sat)}	Collector – emitter saturation voltage	-	2.8	3.2	I _C = 340A, V _{GE} = 15V, T _J = 25°C	V	
		-	3.6	4.1	I _C = 340A, V _{GE} = 15V	V	
V _{T0}	Threshold voltage	-	-	1.73	Current range: 113 – 340A	V	
r _T	Slope resistance	-	-	6.98		mΩ	
V _{GE(TH)}	Gate threshold voltage	-	5.3	-	V _{CE} = V _{GE} , I _C = 36mA	V	
I _{CES}	Collector – emitter cut-off current	-	5	15	V _{CE} = V _{CES} , V _{GE} = 0V	mA	
I _{GES}	Gate leakage current	-	-	±5	V _{GE} = ±20V	μA	
C _{ies}	Input capacitance	-	60	-	V _{CE} = 25V, V _{GE} = 0V, f = 1MHz	nF	
t _{d(on)}	Turn-on delay time	-	3.7	-	I _C = 340A, V _{CE} = 2800V, V _{GE} = ±15V, L _S = 250nH R _{g(ON)} = 18Ω, R _{g(OFF)} = 15Ω, C _{GE} = 47nF Integral diode used as freewheel diode (Note 3)	μs	
t _{r(l)}	Rise time	-	3.6	-		μs	
Q _{g(on)}	Turn-on gate charge	-	1.5	-		μC	
E _{on}	Turn-on energy	-	2.4	-		J	
t _{d(off)}	Turn-off delay time	-	1.8	-		μs	
t _f	Fall time	-	2.2	-		μs	
Q _{g(off)}	Turn-off gate charge	-	3.5	-		μC	
E _{off}	Turn-off energy	-	1.3	-		J	
I _{SC}	Short circuit current	-	1360	-		V _{GE} = ±15V, V _{CC} = 2800V, V _{CEmax} ≤ V _{CES} , t _p ≤ 10μs	A

Diode Characteristics

	PARAMETER	MIN	TYP	MAX	TEST CONDITIONS	UNITS
V _F	Forward voltage	-	3.4	3.7	I _F = 340A, T _J = 25°C	V
		-	3.9	4.2	I _F = 340A	V
V _{To}	Threshold voltage	-	-	2.29	Current range 113-340A	V
r _T	Slope resistance	-	-	5.63		mΩ
I _{rm}	Peak reverse recovery current	-	170	-	I _F = 340A, V _{GE} = ±15V, di/dt = 500A/μs	A
Q _{rr}	Recovered charge	-	320	-		μC
t _{rr}	Reverse recovery time, 50% chord	-	2.5	-		μs
E _r	Reverse recovery energy	-	0.25	-		J

Thermal Characteristics

	PARAMETER	MIN	TYP	MAX	TEST CONDITIONS	UNITS
R_{thJK}	Thermal resistance junction to sink, IGBT	-	-	36.4	Double side cooled	K/kW
		-	-	59.5	Collector side cooled	K/kW
		-	-	94.5	Emitter side cooled	K/kW
R_{thJK}	Thermal resistance junction to sink, Diode	-	-	57.2	Double side cooled	K/kW
		-	-	88	Cathode side cooled	K/kW
		-	-	164	Anode side cooled	K/kW
F	Mounting force	12	-	16	Note 2	kN
W_t	Weight	-	0.65	-		kg

Notes:-

- 1) Unless otherwise indicated $T_J=125^{\circ}\text{C}$.
- 2) Consult application note 2008AN01 for detailed mounting requirements
- 3) C_{GE} is additional gate – emitter capacitance added to output of gate drive

Curves

Figure 1 – Typical collector-emitter saturation voltage characteristics

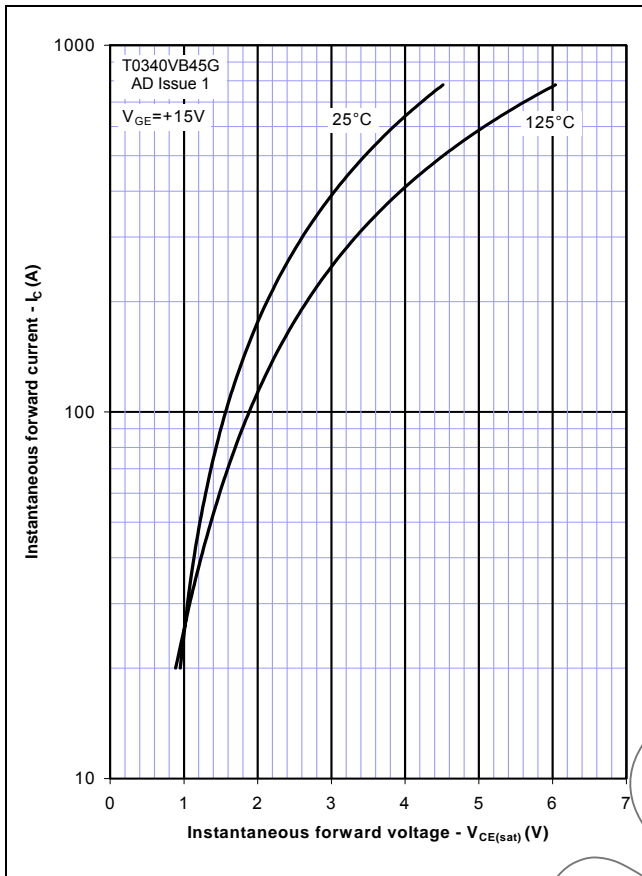


Figure 2 – Typical output characteristic

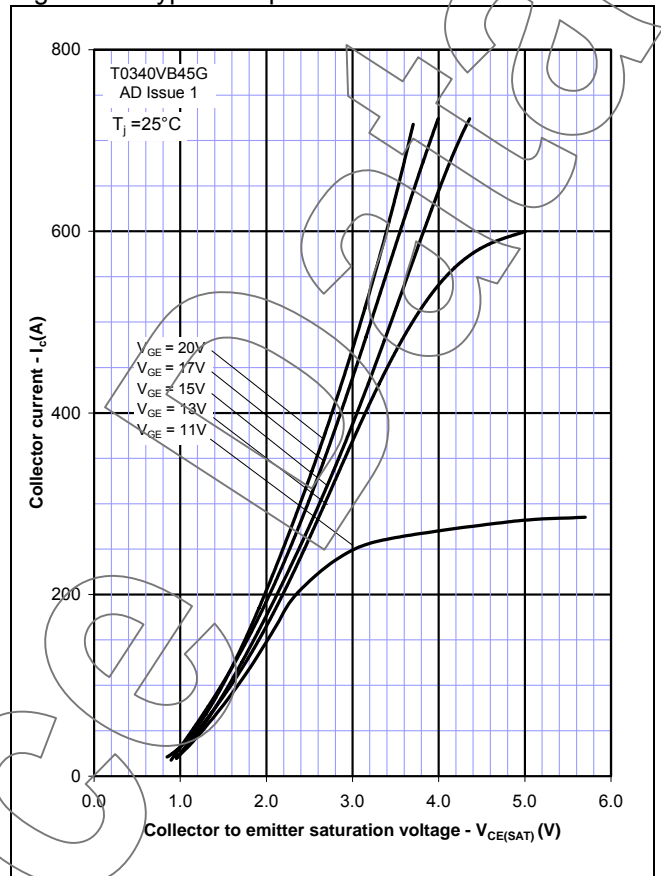


Figure 3 – Typical output characteristic

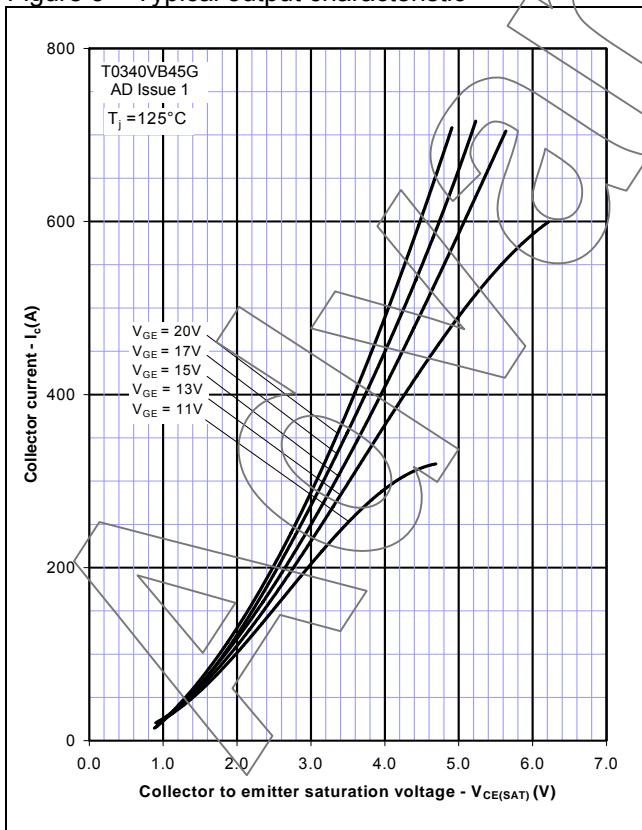


Figure 4 – Typical diode forward characteristic

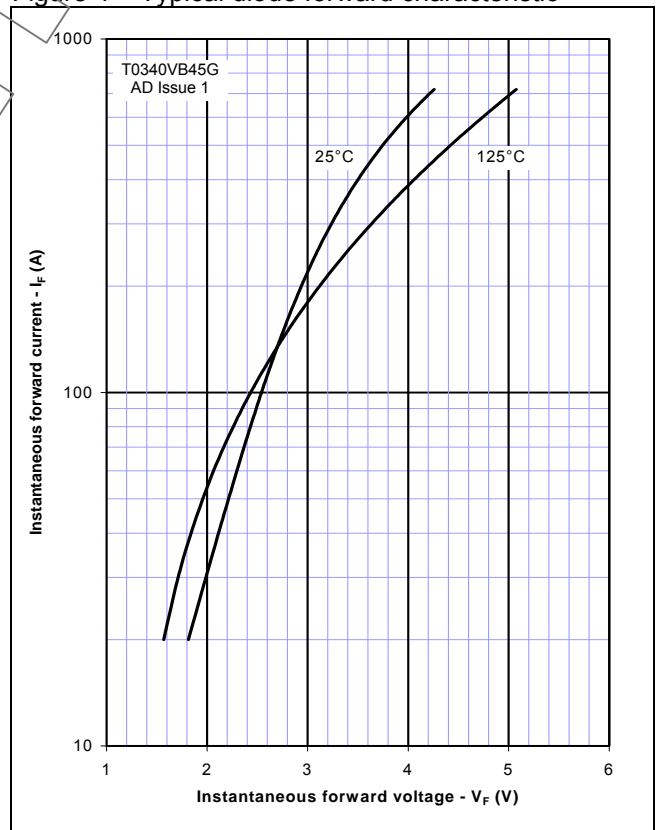


Figure 5 – Transient thermal impedance (IGBT)



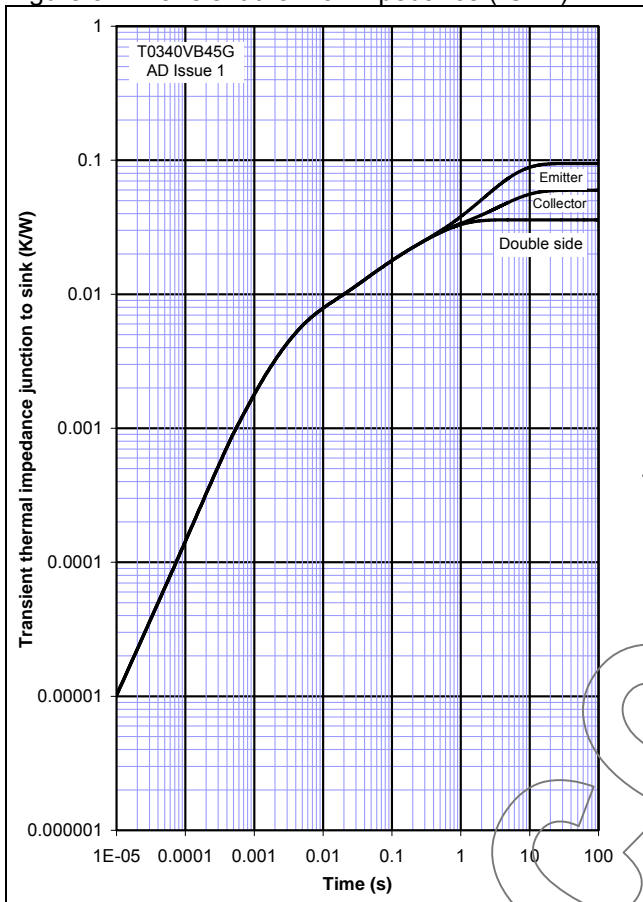


Figure 6 – Transient thermal impedance (Diode)

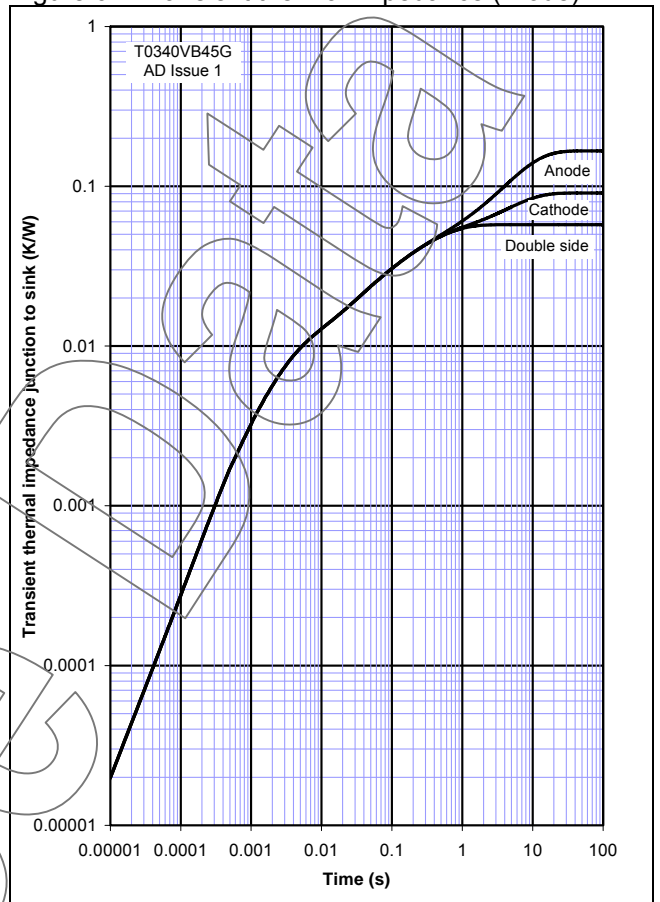

Advanced

Outline Drawing & Ordering Information

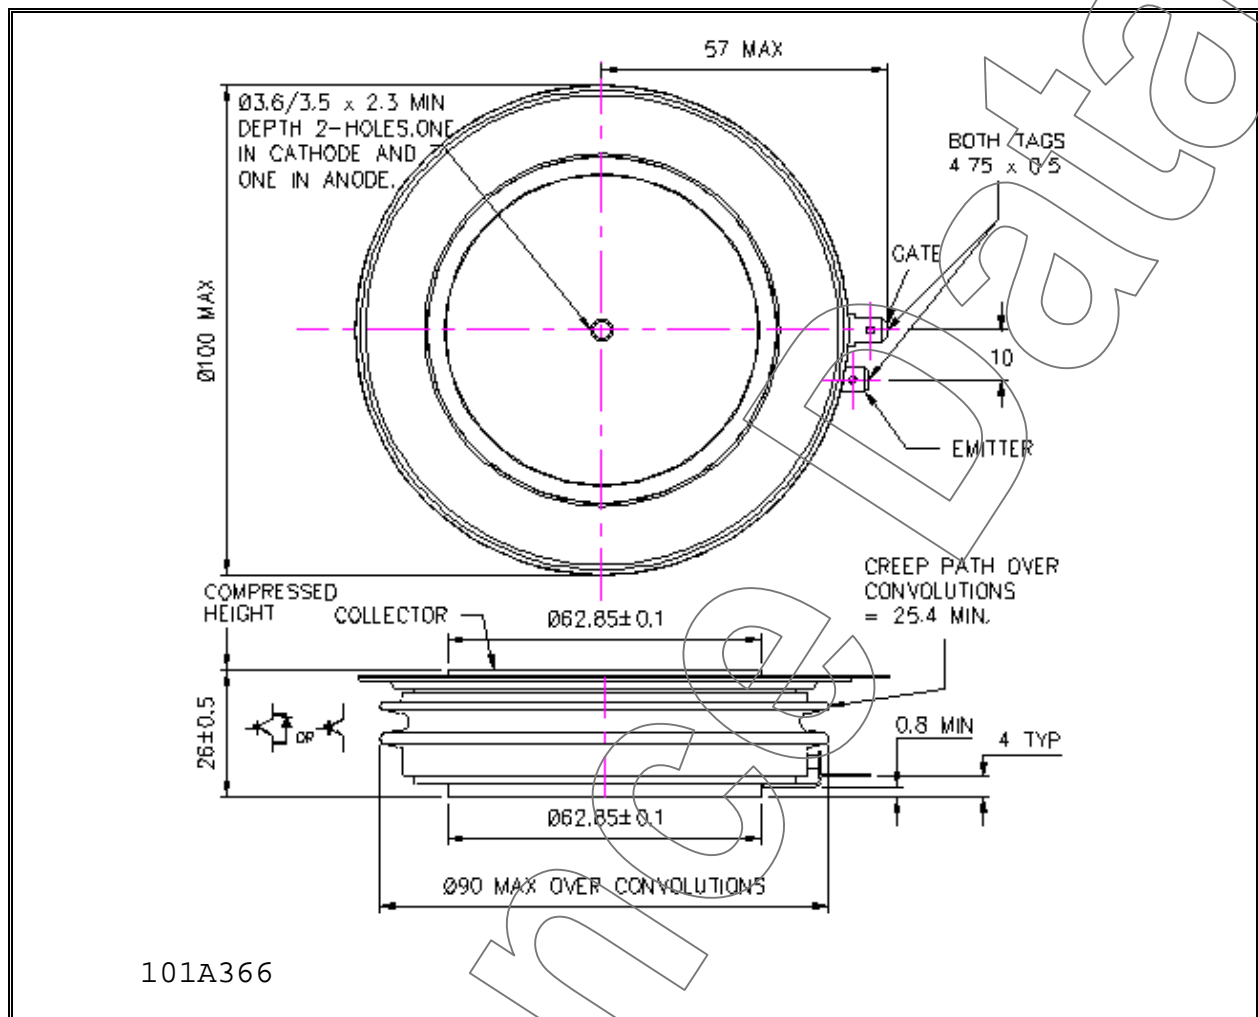

ORDERING INFORMATION

(Please quote 10 digit code as below)

T0340 Fixed type Code	VB Fixed Outline Code	45 Voltage Grade 4500	G Fixed format code
---------------------------------	---------------------------------	---------------------------------	-------------------------------

Typical order code: T0340VB45G ($V_{CES} = 4500V$)

IXYS Semiconductor GmbH
Edisonstraße 15
D-68623 Lampertheim
Tel: +49 6206 503-0
Fax: +49 6206 503-627
E-mail: marcom@ixys.de
IXYS Corporation
1590 Buckeye Drive
Milpitas CA 95035-7418
Tel: +1 (408) 457 9000
Fax: +1 (408) 496 0670
E-mail: sales@ixys.net

WESTCODE

An IXYS Company

www.westcode.com

www.ixys.net

Westcode Semiconductors Ltd
Langley Park Way, Langley Park,
Chippenham, Wiltshire, SN15 1GE.
Tel: +44 (0)1249 444524
Fax: +44 (0)1249 659448
E-mail: WSL.sales@westcode.com
IXYS Long Beach
IXYS Long Beach, Inc
2500 Mira Mar Ave, Long Beach
CA 90815
Tel: +1 (562) 296 6584
Fax: +1 (562) 296 6585
E-mail: service@ixyslongbeach.com

The information contained herein is confidential and is protected by Copyright. The information may not be used or disclosed except with the written permission of and in the manner permitted by the proprietors Westcode Semiconductors Ltd.

© Westcode Semiconductors Ltd.

In the interest of product improvement, Westcode reserves the right to change specifications at any time without prior notice.

Devices with a suffix code (2 letter or letter/digit/letter combination) added to their generic code are not necessarily subject to the conditions and limits contained in this report.